


EVDC | 18K-A++

A++ INVERTER | 60% POWER SAVING | AUTO RESTART | EASY INSTALLATION

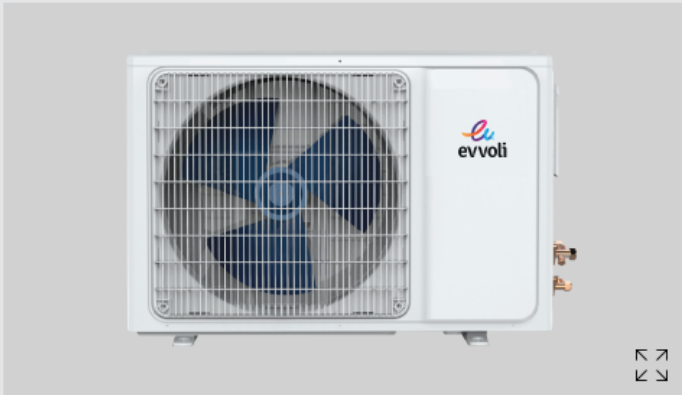

Product Specifications

BASIC INFORMATION

Rated Capacity		
Cooling	Btu	17400(6500-19500)
Heating	Btu	19000(6800-20500)
Rated Running Current		
Cooling	A	7.2(1.4-8.8)
Heating	A	6.5(1.8-9.1)
Max. Input Power	W	2600
Max. Input Current	A	12
EER Cooling	W/W	5.8
COP Heating	W/W	3.8
Power Supply Source	V/Ph/Hz	220~240V/50Hz
Refrigerant		R410A
Refrigerant Charged	g	1400
Max. Discharge Pressure	Mpa	4.15
Max. Suction Pressure	Mpa	1.15
Air Flow Volume	m3/h	1000
Indoor Unit Noise Power	dB(A)	45
Outdoor Unit Noise Power	dB(A)	54
Indoor Unit Weight(Net)	Kg	14
Outdoor Unit Weight(Net)	Kg	38

Container Loading 40HC	Units	195
------------------------	-------	-----

INDOOR UNIT

Evaporator		
Bend		3
Evaporator Row		2
Evaporator Pipe Diameter	mm	7×0.24
Indoor Fan Motor		YVK30-4
Dimension		
Net Dimension	mm	940x316x224
Packing Dimension	mm	1010x385x310

CONNECTION

Stop Valve		
Liquid Valve	mm	Φ6.35
Gas Valve	mm	Φ12.7

OUTDOOR UNIT

Compressor Brand		GMCC
Compressor Model		ASM135
Outdoor Fan Motor		D-40-8 310VDC
Condenser Pipe Diameter	mm	7×0.24
Condenser Row		2
Dimension		
Net Dimension	mm	802×298×535
Packing Dimension	mm	920×400×620