


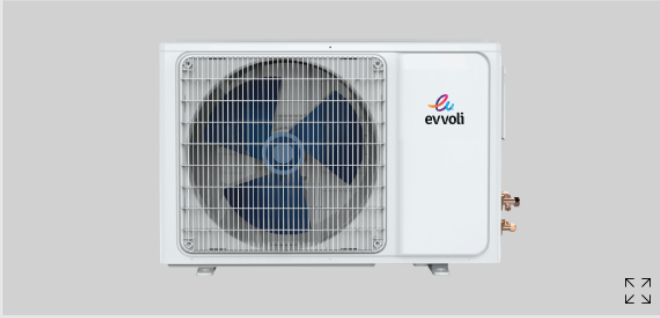

EVDC | 24K-A++

A++ INVERTER | 60% POWER SAVING | AUTO RESTART | EASY INSTALLATION

Product Specifications

BASIC INFORMATION

Rated Capacity		
Cooling	Btu	24000(9200-27000)
Heating	Btu	25000(8000-30000)
Rated Running Current		
Cooling	A	10.2(0.9-13.2)
Heating	A	10.7(1.2-11.6)
Max. Input Power	W	3600
Max. Input Current	A	16
EER Cooling	W/W	2.83
COP Heating	W/W	2.86
Power Supply Source	V/Ph/Hz	220~240V/50Hz
Refrigerant		R410A
Refrigerant Charged	g	1600
Max. Discharge Pressure	Mpa	4.15
Max. Suction Pressure	Mpa	1.15
Air Flow Volume	m3/h	1250
Indoor Unit Noise Power	dB(A)	46
Outdoor Unit Noise Power	dB(A)	57
Indoor Unit Weight(Net)	Kg	16
Outdoor Unit Weight(Net)	Kg	48
Container Loading 40HC		
	Units	138

INDOOR UNIT

Evaporator		
Bend		3
Evaporator Row		2
Evaporator Pipe Diameter	mm	7×0.24
Indoor Fan Motor		YYK50-4
Dimension		
Net Dimension	mm	1132×330×232
Packing Dimension	mm	1205×400×317

CONNECTION

Stop Valve		
Liquid Valve	mm	Φ6.35
Gas Valve	mm	Φ15.88

OUTDOOR UNIT

Compressor Brand		HITACHI
Compressor Model		ATD186
Outdoor Fan Motor		D-69-8
Condenser Pipe Diameter	mm	9.52×0.27
Condenser Row		1
Dimension		
Net Dimension	mm	900×343×681
Packing Dimension	mm	1020×430×770