
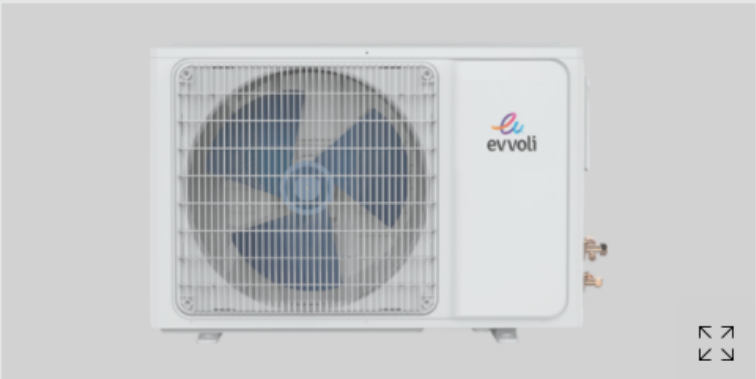


EVPR | 12K-PO

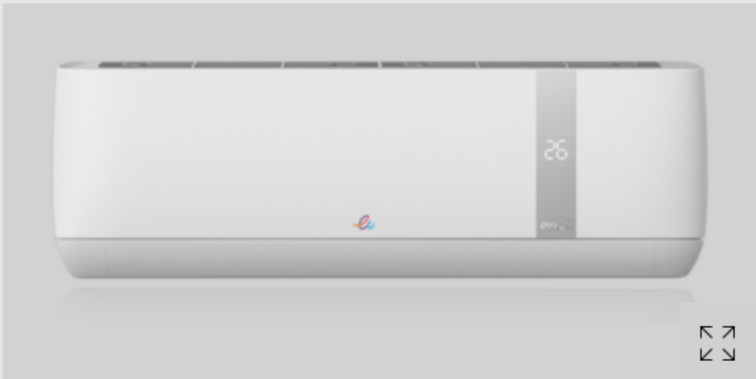

Product Specifications

BASIC INFORMATION

Rated Capacity		
Cooling	Btu(T1/T3)	12000
Heating	Btu	12500
Dehumidifying	Kg/h	1
Rated Running Current		
Cooling	A	5.95
Heating	A	4.88
Max. Input Power	W	1600
Max. Input Current	A	7.1
EER Cooling	W/W	2.61
COP Heating	W/W	3
Power Supply Source	V/Ph/Hz	220-240V~/1/50Hz
Refrigerant		R410A
Refrigerant Charged	g	460
Air Flow Volume	m3/h	410
Noise Power	dB(A)	64
Unit Weight(Net)	Kg	32

EVAPORATOR CONFIGURATION

Row		2
Pipe Diameter	mm	Φ7×0.24
Fan Motor		YYK18-6A
Motor Speed	rpm	680

CONDENSOR CONFIGURATION

Row		2
Pipe Diameter	mm	Φ5×0.2
Indoor Fan Motor		YYK50-4
Motor Speed	rpm	950

COMPRESSOR

Compressor Brand		GMCC
Compressor Model		ASM125

DIMENSION

Net Dimension	mm	480×400×795
Packing Dimension	mm	520x450x885
Container Loading 40HC	Units	346